

CENTRAL BOILER
CLASSIC[®]X

CENTRAL BOILER
CLASSIC[®]XC



In the U.S., this appliance is for non-residential applications only.

**Dual-Fuel Ready
Outdoor Wood Furnace**

**Dual-Fuel Ready
Outdoor Coal Furnace**

The use of wood in this furnace, except for coal ignition purposes, is prohibited by law in the U.S.

25 YEAR
LIMITED
WARRANTY
AVAILABLE




**Inspired by the best-selling
outdoor furnace of all time.**

Built on the superior features of the original Classic, re-imagined to be better than ever, the Classic X and Classic XC deliver unmatched value, legendary reliability and low-maintenance operation.

CentralBoiler.com

The Best just got Better.

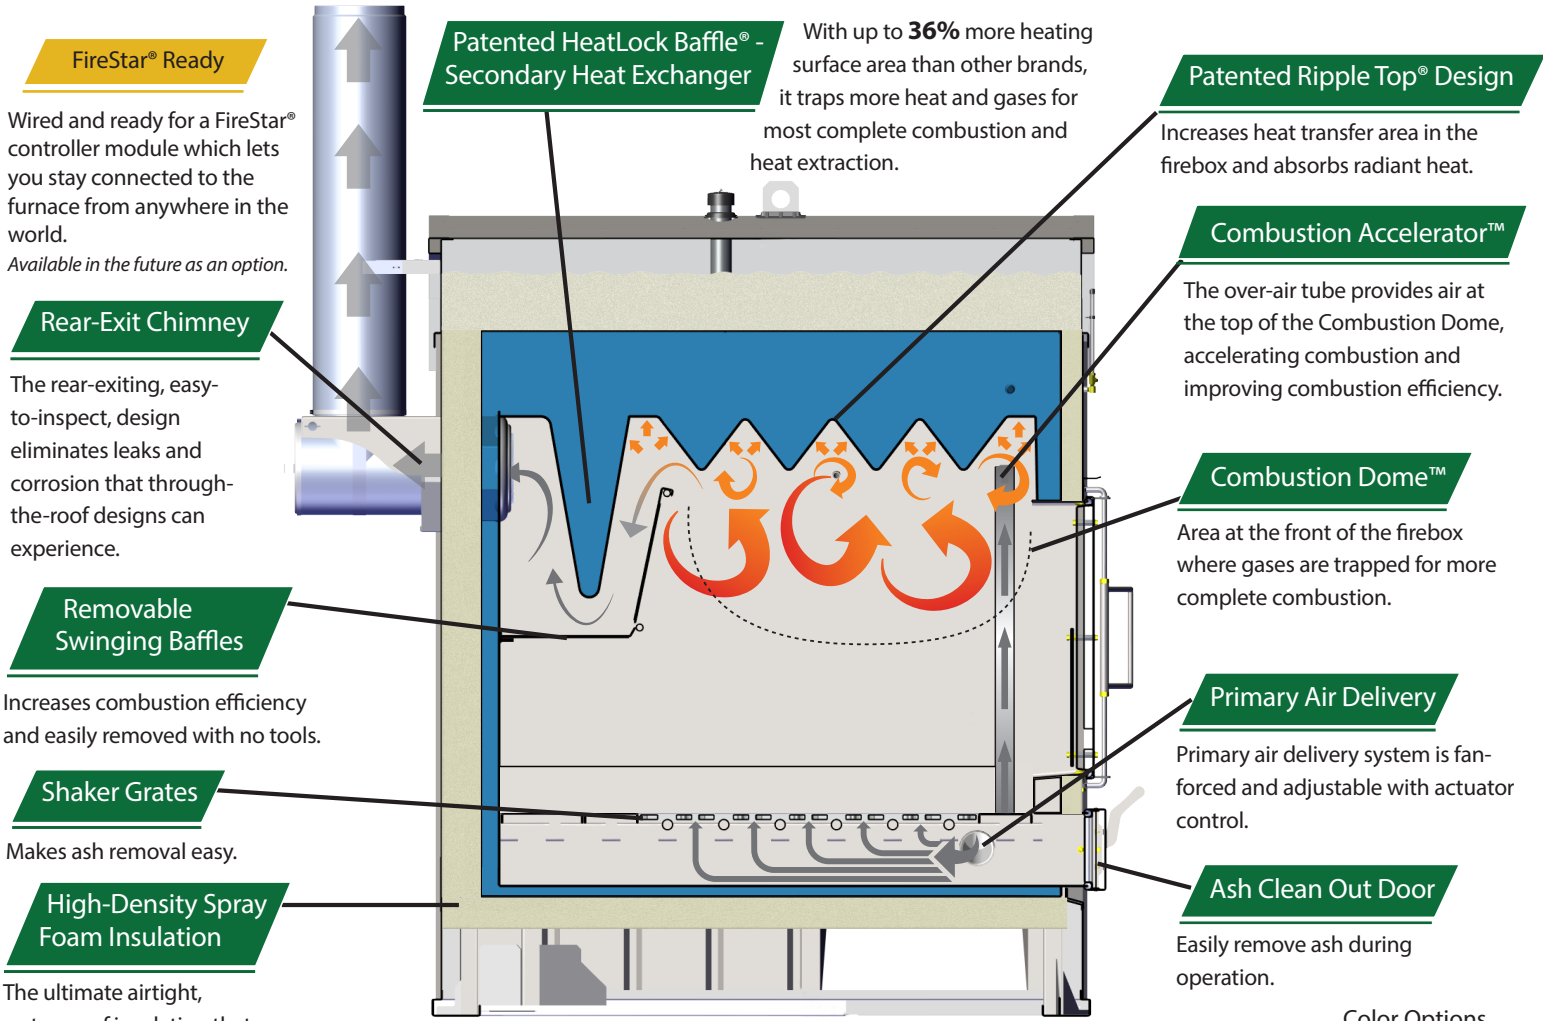

FireStar® Ready

Wired and ready for a FireStar® controller module which lets you stay connected to the furnace from anywhere in the world.
Available in the future as an option.

Rear-Exit Chimney

The rear-exiting, easy-to-inspect, design eliminates leaks and corrosion that through-the-roof designs can experience.

Removable Swinging Baffles

Increases combustion efficiency and easily removed with no tools.

Shaker Grates

Makes ash removal easy.

High-Density Spray Foam Insulation

The ultimate airtight, waterproof insulation that locks the heat in.

Dual Fuel Ready

Easily add an optional fuel oil, natural gas or propane burner (*sold separately*).

Patented HeatLock Baffle® - Secondary Heat Exchanger

With up to **36%** more heating surface area than other brands, it traps more heat and gases for most complete combustion and heat extraction.

Patented Ripple Top® Design

Increases heat transfer area in the firebox and absorbs radiant heat.

Combustion Accelerator™

The over-air tube provides air at the top of the Combustion Dome, accelerating combustion and improving combustion efficiency.

Combustion Dome™

Area at the front of the firebox where gases are trapped for more complete combustion.

Primary Air Delivery

Primary air delivery system is fan-forced and adjustable with actuator control.

Ash Clean Out Door

Easily remove ash during operation.

Classic X 6048/Classic XC 6048


Door	23" x 31"
Firebox	59" x 44" x 36"
Firebox Volume	37.7 cu ft
Weight (est.)	2,000 lbs
Water Capacity	350 gal.
Chimney	One 4-foot 8" section
1-1/4" Supply/Return Ports	3 ea

Classic X 5036/Classic XC 5036

Door	23" x 23"
Firebox	50" x 34" x 30"
Firebox Volume	20.6 cu ft
Weight (est.)	1,300 lbs
Water Capacity	171 gal.
Chimney	One 4-foot 6" section
1-1/4" Supply/Return Ports	2 ea

Color Options

FOREST GREEN	CHARCOAL
BLACK	

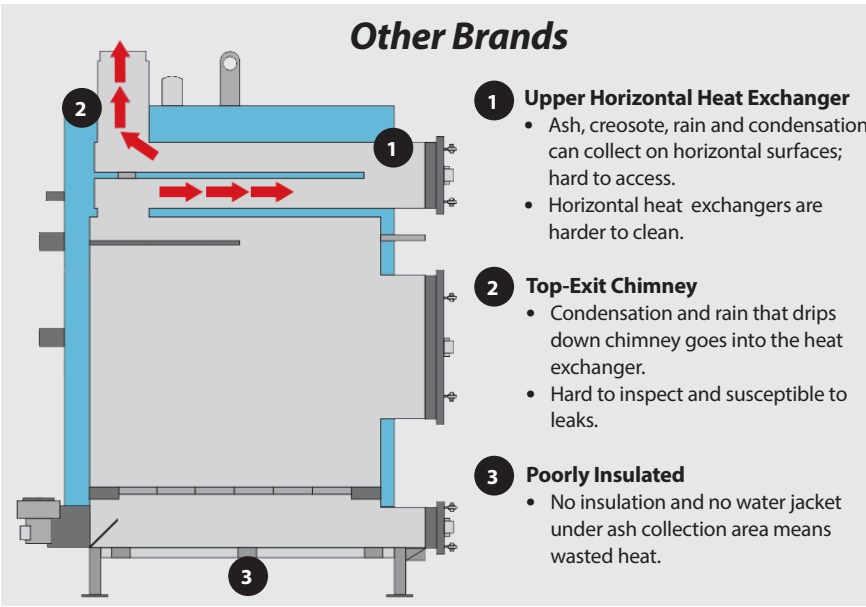

Quick Comparisons to Other Brands

	Performance	Firebox	Heat Exchanger
Classic X Classic XC	+24.6%	Rectangular	Ripple Top with HeatLock Baffle
Classic	+8.2%	Rectangular	Ripple Top with HeatLock Baffle
Other Brands	Baseline	Oval-Shaped	Horizontal

Laboratory test.

Your Authorized Central Boiler Dealer